# **FJZMPMPAD**



OM3 MPO (Female) to MPO (Female), InstaPATCH® 360 Preterminated Trunk Cable, 12-Fiber, Low Smoke Zero Halogen

#### **Product Classification**

Regional Availability

Asia | Australia/New Zealand | Europe | Latin America | Middle East

/Africa | North America

Portfolio CommScope®

Product Type Fiber trunk cable assembly
Product Brand SYSTIMAX InstaPATCH® 360

**Ordering Note**For lengths greater than 999 ft (304 m), orders must be in meters | Minimum length

may vary based on cable configuration | Not available in the United States or Canada

### General Specifications

Color, boot ABlackColor, boot BBlackColor, connector AAquaColor, connector BAquaConstruction TypeStranded

Fibers per Subunit, quantity 12

Furcation Color Aqua

 Interface, Connector A
 MPO-12/UPC

 Interface, Connector B
 MPO-12/UPC

Jacket Color Aqua

Total Fibers, quantity 12

#### **Dimensions**

Breakout Length33 inCable Assembly Length, minimum (ft)10Cable Assembly Length, maximum (ft)999

Page 1 of 3




# **FJZMPMPAD**

Cable Assembly Length, minimum (m) 3

Cable Assembly Length, maximum (m) 999

## Ordering Tree

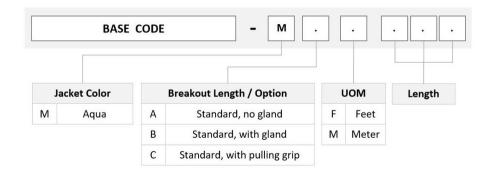

### Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0  $^{\circ}$  | 4.40 lb @ 90  $^{\circ}$ 

**Optical Specifications** 

**Fiber Mode** Multimode

**Fiber Type** OM3, LazrSPEED®

## **Environmental Specifications**

Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)

**Environmental Space** Dual Rated LSZH/Riser

### Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant



#### Included Products



# **FJZMPMPAD**

 $760050336\,$  — LazrSPEED® Low Smoke Zero Halogen Riser MPO Trunk Cable, 12 fiber N-012-MP-5L-F12AQ/D

860647054 - MPO12, LOW LOSS, FEMALE, OM3/4, AQUA, 3mm

