


# NPC6ASVDB-BL

---

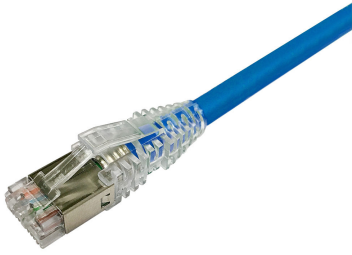

## NPC RJ45 Patch Cord, category 6A, Shielded, CM (PVC), Blue

- High-performance patch cords exceeding industry standards supporting NETCONNECT channel specifications
- Standardized transparent, slim-line boots provides consistent patch cord appearance and supports highest density applications
- Colored clips are available to fit the transparent boot, eliminating the need of multiple colors for matching every jacket color
- Colored pull latch tabs are available for easier plug release handling from the modular jack

## Product Classification

<b>Regional Availability</b>	Latin America
<b>Portfolio</b>	NETCONNECT®
<b>Product Type</b>	Twisted pair patch cord
<b>Product Series</b>	NPC

## General Specifications

<b>ANSI/TIA Category</b>	6A
<b>Cable Type</b>	S/FTP (shielded)
<b>Conductor Type</b>	Stranded
<b>Interface Feature, connector A</b>	Standard
<b>Interface Feature, connector B</b>	Standard
<b>Interface, Connector A</b>	RJ45 plug
<b>Interface, Connector B</b>	RJ45 plug
<b>Jacket Color</b>	Blue
<b>Pairs, quantity</b>	4
<b>Wiring</b>	T568B


## Dimensions

<b>Cable Assembly Length, minimum (ft)</b>	1
<b>Cable Assembly Length, maximum (ft)</b>	100
<b>Diameter Over Jacket</b>	5.7 mm   0.224 in
<b>Compatible Conductor Gauge, stranded</b>	26 AWG

## Ordering Tree

# NPC6ASVDB-BL

---

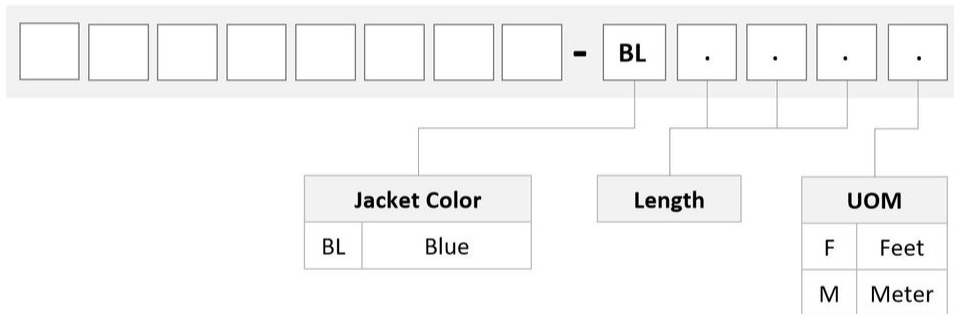

## Material Specifications

**Insulation Material** Polyethylene

**Material Type** PVC

## Mechanical Specifications

**Plug Insertion Life, minimum** 750 times

## Environmental Specifications

**Operating Temperature** -20 °C to +60 °C (-4 °F to +140 °F)

**Relative Humidity** Up to 93%, non-condensing

**Environmental Space** Non-plenum

**Flammability Rating** CM

# NPC6ASVDB-BL

---

**Safety Standard** UL 1863

## Packaging and Weights

**Packaging quantity** 1

## Included Products

2843032-3 — Modular Plug Shielded Slim-Line Boot for Category 6A/6 and Category 5e EMT Plugs, 4.7 to 6.0 mm, transparent  
MP-Boot-S/SL-AB

6-2111989-3 — Modular Plug Kit, category 6, shielded, 8-position, 5.7 – 7.0 mm max cable jack OD, 100/bag  
MP-6S-C-1