NPCO6UVDB-GN



NPC RJ45 Patch Cord, category 6, Unshielded, CM (PVC), Green

Asia | Australia/New Zealand | Latin America

NETCONNECT®

NPC

Twisted pair patch cord

- High-performance patch cords exceeding industry standards supporting NETCONNECT channel specifications
- Standardized transparent, slim-line boots provides consistent patch cord appearance and supports highest density applications
- Colored clips are available to fit the transparent boot, eliminating the need of multiple colors for matching every jacket color
- Colored pull latch tabs are available for easier plug release handling from the modular jack

Regional Availability

Portfolio

Product Type

Product Series

General Specifications

ANSI/TIA Category	6
Cable Type	U/UTP (unshielded)
Conductor Type	Stranded
Interface Feature, connector A	Standard
Interface Feature, connector B	Standard
Interface, Connector A	RJ45 plug
Interface, Connector B	RJ45 plug
Jacket Color	Green
Pairs, quantity	4
Wiring	T568B
Dimensions	


Cable Assembly Length, minimum (ft)	1
Cable Assembly Length, maximum (ft)	100
Diameter Over Jacket	5.97 mm 0.235 in
Compatible Conductor Gauge, stranded	24 AWG

Ordering Tree

Page 1 of 3

©2020 CommScope, Inc. All rights reserved. All trademarks identified by ® or [™] are registered trademarks, respectively, of CommScope. All specifications are subject to change without notice. See www.commscope.com for the most current information. Revised: April 27, 2020



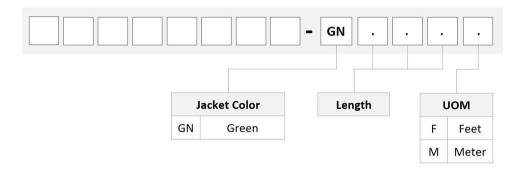

Material Specifications	
Insulation Material	Polyethylene
Material Type	PVC
Mechanical Specifications	7F0 times
Plug Insertion Life, minimum	750 times
Environmental Specifications	
Operating Temperature	-20 °C to +60 °C (-4 °F to +140 °F)
Relative Humidity	Up to 93%, non-condensing
Environmental Space	Non-plenum
Flammability Rating	CM

Page 2 of 3

©2020 CommScope, Inc. All rights reserved. All trademarks identified by ® or ™ are registered trademarks, respectively, of CommScope. All specifications are subject to change without notice. See www.commscope.com for the most current information. Revised: April 27, 2020

COMMSCOPE°

NPCO6UVDB-GN

Safety Standard

UL 1863

1

Packaging and Weights

Packaging quantity

Regulatory Compliance/Certifications

Classification

Agency

RCM

Compliant to electrical safety, EMC, EME & telecommunications requirements



Included Products

 2843020-3 MP-6AU-Boot-59-1 — Integrated Boot and Pair Manager for MP-6AU, size 59, transparent
6-2843007-1 MP-6AU-Plug-A-1 — Modular Plug, Category 6A/6, Unshielded, Cond Insulation OD - 0.99mm, 100 pcs
CC8862844/BU CC6CM GRN 4/24 SR U/UTP RL BULK — CC6CM Category 6 U/UTP Cable, non-plenum, green jacket, 4 pair count, bulk length, reel

