


NPC6ASVDB-GY

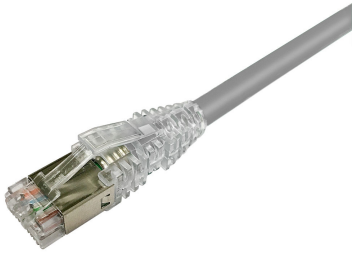

NPC RJ45 Patch Cord, category 6A, Shielded, CM (PVC), Gray

- High-performance patch cords exceeding industry standards supporting NETCONNECT channel specifications
- Standardized transparent, slim-line boots provides consistent patch cord appearance and supports highest density applications
- Colored clips are available to fit the transparent boot, eliminating the need of multiple colors for matching every jacket color
- Colored pull latch tabs are available for easier plug release handling from the modular jack

Product Classification

Regional Availability	Latin America
Portfolio	NETCONNECT®
Product Type	Twisted pair patch cord
Product Series	NPC

General Specifications


ANSI/TIA Category	6A
Cable Type	S/FTP (shielded)
Conductor Type	Stranded
Interface Feature, connector A	Standard
Interface Feature, connector B	Standard
Interface, Connector A	RJ45 plug
Interface, Connector B	RJ45 plug
Jacket Color	Gray
Pairs, quantity	4
Wiring	T568B

Dimensions

Cable Assembly Length, minimum (ft)	1
Cable Assembly Length, maximum (ft)	100
Diameter Over Jacket	5.7 mm 0.224 in
Compatible Conductor Gauge, stranded	26 AWG

Ordering Tree

NPC6ASVDB-GY

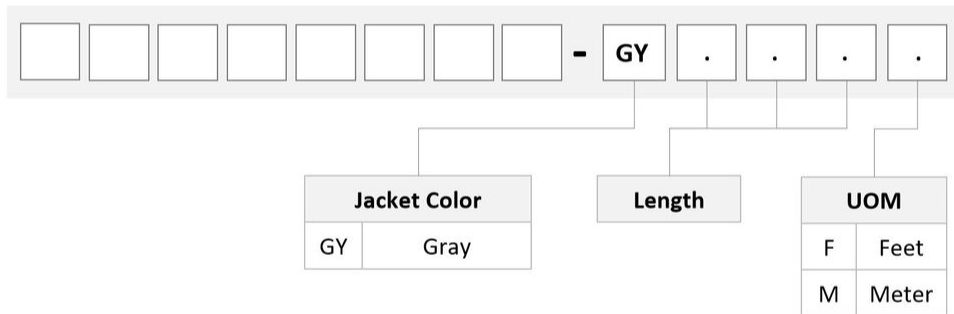

Material Specifications

Insulation Material	Polyethylene
Material Type	PVC

Mechanical Specifications

Plug Insertion Life, minimum	750 times
-------------------------------------	-----------

Environmental Specifications

Operating Temperature	-20 °C to +60 °C (-4 °F to +140 °F)
Relative Humidity	Up to 93%, non-condensing
Environmental Space	Non-plenum
Flammability Rating	CM

NPC6ASVDB-GY

Safety Standard UL 1863

Packaging and Weights

Packaging quantity 1

Included Products

2843032-3

MP-Boot-S/SL-AB

—

6 - 2 1 1 1 9 8 9 - 3

MP-6S-C-1 — Modular Plug Kit, category 6, shielded, 8-position, 5.7 – 7.0 mm max cable jack OD, 100/bag