


NPC6ASVDB-GN

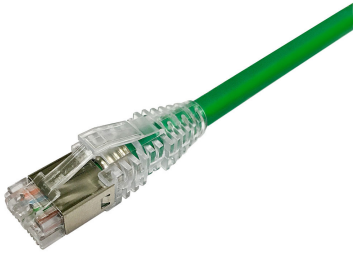

NPC RJ45 Patch Cord, category 6A, Shielded, CM (PVC), Green

- High-performance patch cords exceeding industry standards supporting NETCONNECT channel specifications
- Standardized transparent, slim-line boots provides consistent patch cord appearance and supports highest density applications
- Colored clips are available to fit the transparent boot, eliminating the need of multiple colors for matching every jacket color
- Colored pull latch tabs are available for easier plug release handling from the modular jack

Product Classification

Regional Availability	Latin America
Portfolio	NETCONNECT®
Product Type	Twisted pair patch cord
Product Series	NPC

General Specifications


ANSI/TIA Category	6A
Cable Type	S/FTP (shielded)
Conductor Type	Stranded
Interface Feature, connector A	Standard
Interface Feature, connector B	Standard
Interface, Connector A	RJ45 plug
Interface, Connector B	RJ45 plug
Jacket Color	Green
Pairs, quantity	4
Wiring	T568B

Dimensions

Cable Assembly Length, minimum (ft)	1
Cable Assembly Length, maximum (ft)	100
Diameter Over Jacket	5.7 mm 0.224 in
Compatible Conductor Gauge, stranded	26 AWG

Ordering Tree

NPC6ASVDB-GN

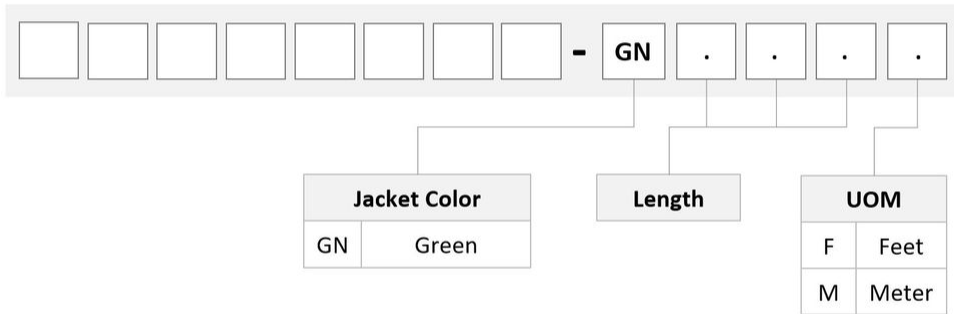

Material Specifications

Insulation Material Polyethylene

Material Type PVC

Mechanical Specifications

Plug Insertion Life, minimum 750 times

Environmental Specifications

Operating Temperature -20 °C to +60 °C (-4 °F to +140 °F)

Relative Humidity Up to 93%, non-condensing

Environmental Space Non-plenum

Flammability Rating CM

NPC6ASVDB-GN

Safety Standard UL 1863

Packaging and Weights

Packaging quantity 1

Included Products

2843032-3 — Modular Plug Shielded Slim-Line Boot for Category 6A/6 and Category 5e EMT Plugs, 4.7 to 6.0 mm, transparent
MP-Boot-S/SL-AB

6-2111989-3 — Modular Plug Kit, category 6, shielded, 8-position, 5.7 – 7.0 mm max cable jack OD, 100/bag
MP-6S-C-1