


760004523 | R-002-ZC-8W-F16YL  
1.6 mm Riser Zipcord Cable

## Representative Image

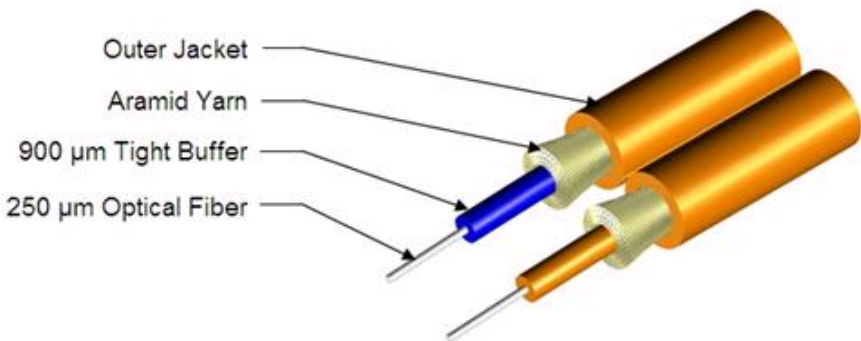

## General Specifications

Cable Type	Cordage
Construction Type	Non-armored
Subunit Type	Gel-free

## Construction Materials

Fiber Type Solution	TeraSPEED®, zero water peak singlemode fiber
Total Fiber Quantity	2
Fiber Type	TeraSPEED®, zero water peak singlemode fiber
Fiber Type, quantity	2
Jacket Color	Yellow

## Dimensions

Cable Weight	3.4 lb/kft   5.0 kg/km
Height Over Jacket	1.70 mm   0.07 in
Width Over Jacket	3.50 mm   0.14 in

## Physical Specifications

Minimum Bend Radius, loaded	5.0 cm   2.0 in
Minimum Bend Radius, unloaded	3.0 cm   1.2 in
Tensile Load, long term, maximum	21 lbf   93 N

760004523 | R-002-ZC-8WF16YL

Tensile Load, short term, maximum 311 N | 70 lbf  
Vertical Rise, maximum 500.0 m | 1640.4 ft

## Flame Test Specifications

Flame Test Listing	NEC OFNR (ETL) and c(ETL)
Flame Test Method	UL 1666

## Environmental Specifications

Environmental Space	Riser
Installation Temperature	-20 °C to +70 °C (-4 °F to +158 °F)
Operating Temperature	-20 °C to +70 °C (-4 °F to +158 °F)
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)

## Mechanical Test Specifications

Compression	10 N/mm   57 lb/in
Compression Test Method	FOTP-41   IEC 60794-1-2, Section 7
Flex	300 cycles
Flex Test Method	FOTP-104   IEC 60794-1-2, Section 10
Impact	0.55 ft lb   0.74 N-m
Impact Test Method	FOTP-25   IEC 60794-1-2, Section 8
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33   IEC 60794-1-2, Section 5
Twist	10 cycles
Twist Test Method	FOTP-85   IEC 60794-1-2, Section 11

## Environmental Test Specifications

Heat Age	-20 °C to +85 °C (-4 °F to +185 °F)
Heat Age Test Method	Not applicable
Low High Bend	-20 °C to +70 °C (-4 °F to +158 °F)
Low High Bend Test Method	FOTP-28   IEC 60794-1-2, Section 28
Temperature Cycle	-20 °C to +70 °C (-4 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3   IEC 60794-1-2, Section 22

## Qualification Specifications

Cable Qualification Standards	ANSI/ICEA S-83-596-2001   Telcordia GR-409-CORE Issue 2
-------------------------------	---

## Regulatory Compliance/Certifications

Agency	Classification
RoHS 2002/95/EC	Compliant
ISO 9001:2008	Designed, manufactured and/or distributed under this quality management system



760004523 | R-002-ZC-8W-F16YL

---

## Included Products

---

CS-8W-TB (Product Component—not orderable) — TeraSPEED® Singlemode Fiber